

Oct. 27, 2007 IEEE W


Mobile WiMax 802.16e


Pleasant-to-use and portable multimedia communication

Wireless access point




WiFi Products (802.11a/b/g)

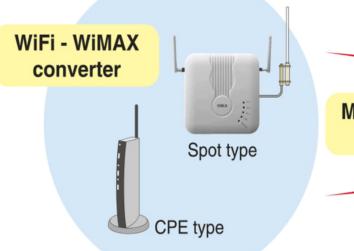





WiFi - WiMAX linkage security and QoS

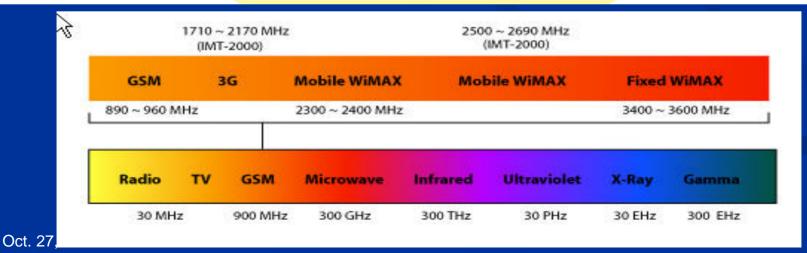

2

Data rates for wireless technologies

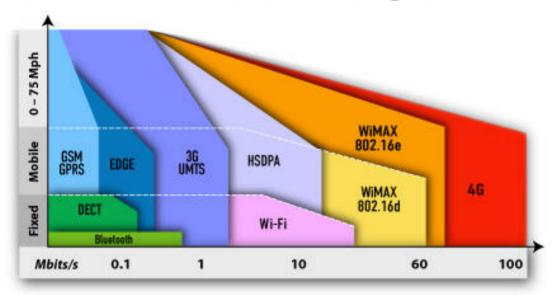

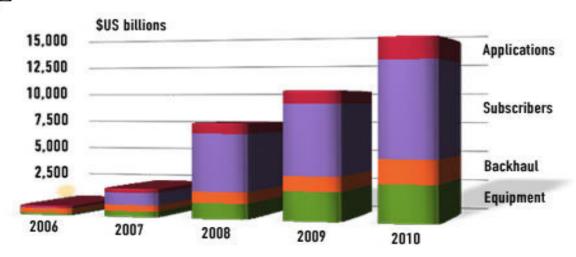

Designed to operate in the 2-11 GHz band

NLOS: 10 km

LOS: 80 km

Aircel, VSNL, ...

- ABS (Aircel Business Solutions) has enabled wireless connectivity in Chennai for SMEs and Enterprise clients through WiMAX (fixed) based on 802.16d standards at a speed range of 2 to 10 Mbps (Oct. 2006)
 - http://www.cxotoday.com/India/News/Chennai_Gets_WiMAX_Courtesy_Aircel/551-76481-912.html
 - ABS plans to expand its network to cover 44 cities
- Mobile and broadband player Videsh Sanchar Nigam (VSNL) has set aside a capex of Rs 1,000 crore for its WiMAX services (Oct. 3, 2007)
 - VSNL, already runs a WiMAX service for enterprises in Bangalore and has been allocated spectrum for another 50-60 cities
 - http://www.businessstandard.com/common/storypage_c.php?leftnm=10&autono=30 0060

BSNL, MTNL ...

- BSNL is set to issue tenders for setting up 50,000 Common Service Centres (CSCs) — ICT-enabled kiosks — across the country (Oct. 4, 2007)
 - This will be one of the largest deployment of WiMax in the world
 - BSNL would be allocated spectrum in the 2.5 GHz frequency band for its WiMax deployment
 - The project is expected to be completed by August 08.
 - These CSCs will primarily cater to semi-urban and rural areas across the country
 - http://economictimes.indiatimes.com/News by Industry/BSNL to invit e tenders for setting up 50K WiMax kiosks/articleshow/2426978.cms
- Indian government is planning to set up a national working group on WiMax consisting of all stakeholders — government, service providers, equipment manufacturers and test equipment suppliers. The group will formulate strategy for active participation in the global WiMax forum proceedings.
 - http://economictimes.indiatimes.com/Infotech/Internet_/National_WiMa x_group_soon_for_global_reach/articleshow/2421408.cms

Two Big News Item

- International Telecommunications Union (ITU)
 has approved a non-cellular
 telecommunications technology- WiMAX- as
 part of the union's 3G standards (part of IMT 2000)
 - Operators with 3G spectrum in the 2.5 GHz bands globally can use WiMAX to build out a network
 - Of course, each country's regulators ultimately decide, the ITU decision does make a difference

ATMEL WIMAX Chipset (Low Cost)

2. The AT86RF535B and the AT86RF525B are fully integrated, low cost, direct conversion (low-IF or zero-IF configurable) transceivers supporting IEEE 802.16-2004 (.16d - fixed) and 802.16-2005 (.16e - Mobile) WiMAX applications

Key features of AT86RF535B MAX-Link Transceiver

- Single-chip 3.5GHz WiMAX Transceiver, Low-IF/Zero-IF Transceiver Architecture; Requires No External Filters, Integrated Self IQ Calibration, HFDD Support, Fully Differential Design, Self Calibration Mode for RX / TX Filters, Modulation up to 64QAM, Support Channel Bandwidths of 3.5, 5.0, 7.0, 8.75MHz, and 10MHz, Ultra-fast Fractional-N Synthesizer, Phase Noise Synthesizer: 0.8° (-37dBc), Sensitivity < -74 dBm at 64-QAM, CR=¾, 7MHz BW, Low Supply Voltage: 3.0 V, RX/TX Operating Current: 270/315mA Typical, TX Output PRF: 0 dBm, -34 dB EVM, Low Power Off Current: < 20μA Typical, Low External Component Count, 56-lead QFN Package</p>
- Price: \$14.95 each (10K lot qty).

Great Panel

- Prof. David Koilpillai IIT Madras
- Prof. Huzur Saran IIT Delhi
- Dr. Ajay Bakre / A. Murugappan Intel

- Key Issues:
 - Spectrum allotment from Govt. of India
 - Range and Power requirements of current WiMAX equipment
 - Cost to client

LG Wimax KC1 PDA Cell Phone